




Tipo A
(senza smusso di protezione)

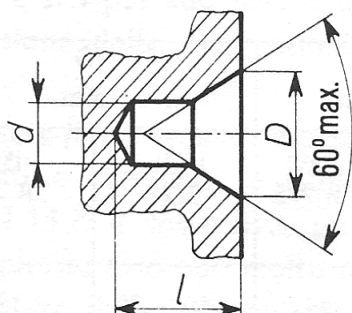

Tipo B
(con smusso di protezione)
per $d \geq 1$ mm

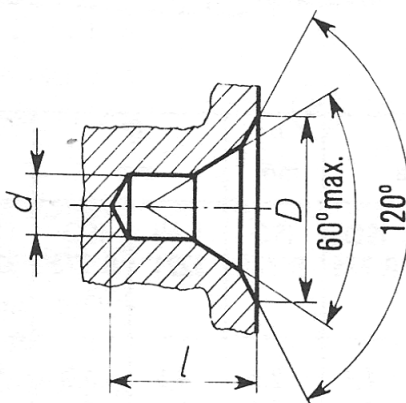

Tipo R
(a profilo curvilineo)
per $d \geq 1$ mm

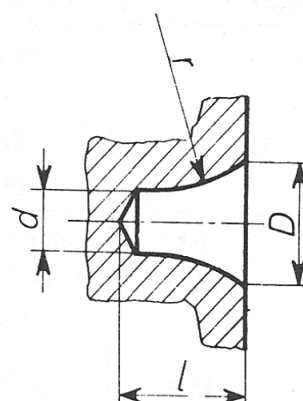

Esempio di designazione di un foro da centro, tipo **B** (con smusso di protezione), avente $d = 2,5$ mm:

Foro B 2,5 UNI 3220-74

d	D		l min.		r
	Tipi A e R	Tipo B	Tipi A e R	Tipo B	
0,5	1,06	—	1,10	—	—
0,63	1,32	—	1,40	—	—
0,8	1,70	—	1,70	—	—
1	2,12	3,15	2,10	2,40	3,15
1,25	2,65	4	2,60	3,0	4,0
1,6	3,35	5	3,20	3,70	5,0
2	4,25	6,3	4,10	4,70	6,3
2,5	5,30	8	5,10	5,90	8,0
3,15	6,70	10	6,50	7,50	10,0
4	8,50	12,5	8,20	9,40	12,5
5	10,60	16	10,10	11,70	16,0
6,3	13,20	18	12,60	14,0	20,0
8	17,00	22,4	16,30	17,90	25,0
10	21,20	28	20,20	22,20	31,0