


DIN 6499/B
ISO 15488 - B

PINZE ER
ER COLLETS

PRECISIONE
RUNOUT

≤ 0,010

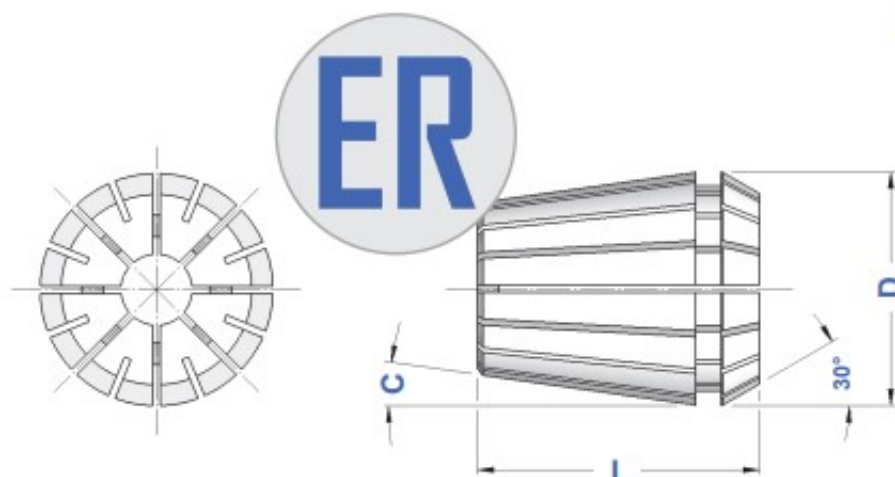

| TIPO | RANGE | SERRAGGIO | STEP | D | L | C | Einheits |
|-------|--|----------------------------|------|------|----------------------------|-----|----------|
| ER 8 | 1 ÷ 5 | mm 0,5 | 0,5 | 8,5 | 13,5 | 8° | 4004E |
| ER 11 | 1 ÷ 7 OVERSIZE 7,5 ÷ 8 | mm 0,5 mm 0,5 | 0,5 | 11,5 | 18,0 OVERSIZE → 15,0 | 8° | 4008E |
| ER 12 | 1 ÷ 3 3 ÷ 8 | mm 0,5 mm 1,0 | 0,5 | 12,0 | 19,5 | 8° | 424E |
| ER 16 | 1 ÷ 3 3 ÷ 10 OVERSIZE 11 ÷ 12 | mm 0,5 mm 1,0 mm 0,5 | 0,5 | 17,0 | 27,5 OVERSIZE → 21,5 | 8° | 426E |
| ER 20 | 1 ÷ 3 3 ÷ 13 OVERSIZE 14 ÷ 15 | mm 0,5 mm 1,0 mm 0,5 | 0,5 | 21,0 | 31,5 OVERSIZE → 26,5 | 8° | 428E |
| ER 25 | 1 ÷ 3 3 ÷ 16 OVERSIZE 17 ÷ 20 | mm 0,5 mm 1,0 mm 0,5 | 0,5 | 26,0 | 34,0 OVERSIZE → 28,0 | 8° | 430E |
| ER 32 | 2 ÷ 20 OVERSIZE 21 ÷ 25 | mm 1,0 mm 0,5 | 0,5 | 33,0 | 40,0 OVERSIZE → 34,0 | 8° | 470E |
| ER 40 | 3 ÷ 30 OVERSIZE 31 ÷ 32 | mm 1,0 mm 0,5 | 0,5 | 41,0 | 46,0 OVERSIZE → 39,5 | 8° | 472E |
| ER 50 | 6 ÷ 34 OVERSIZE 35 ÷ 36 | mm 1,0 mm 1,0 | 1,0 | 52,0 | 60,0 OVERSIZE 60,0 | 8° | 477E |
| ER 60 | 10 ÷ 40 | mm 2,0 | 2,0 | 61,0 | 60,0 | 10° | 494E |