
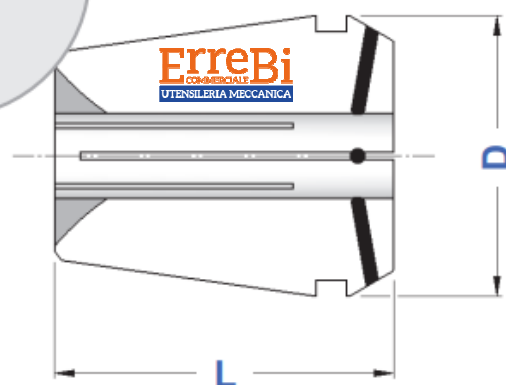


DIN 6499/A
ISO 15488 - A

PINZE ER A TENUTA STAGNA
WATERTIGHT ER COLLETS

PRECISIONE
RUNOUT

 $\leq 0,010$

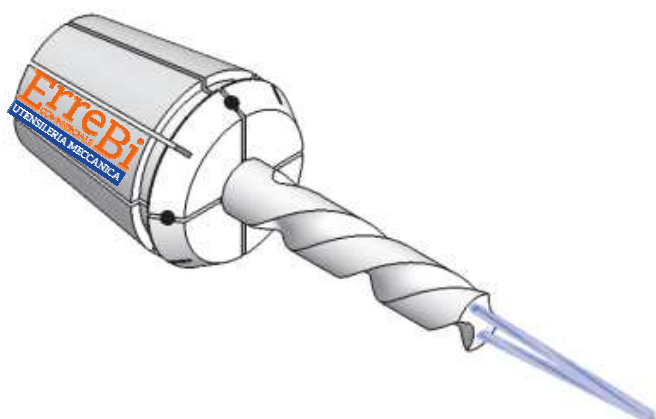

TIPO	RANGE	D	L	STEP
ER 11 RF	1 ÷ 7	11,5	18,0	0,5
ER 16 RF	1 ÷ 10	17,0	27,5	0,5
ER 20 RF	2 ÷ 13	21,0	31,5	0,5
ER 25 RF	2 ÷ 16	26,0	34,0	0,5
ER 32 RF	3 ÷ 20	33,0	40,0	0,5
ER 40 RF	4 ÷ 26	41,0	46,0	1,0
ER 50 RF	6 ÷ 34	52,0	60,0	1,0