


DIN 6499/B
ISO 15488-B

PINZE ER DI ALTA PRECISIONE
HIGH PRECISION ER COLLETS

PRECISIONE
RUNOUT

 $\leq 0,005$

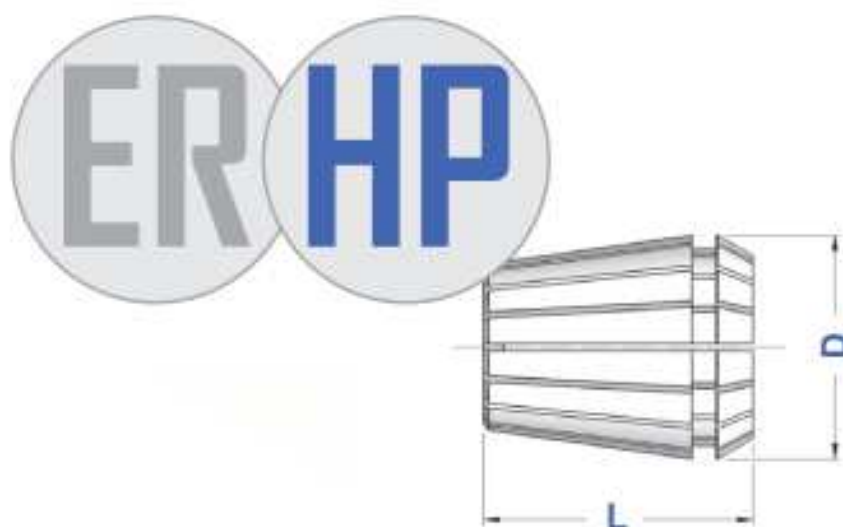

$\leq 0,005$ 

TIPO	RANGE	D	L
ER 8 HP	1 ÷ 5	8,5	13,5
ER 11 HP	1 ÷ 7 OVERSIZE 7,5 ÷ 8	11,5	18,0 OVERSIZE → 15,0
ER 16 HP	1 ÷ 10 OVERSIZE 11 ÷ 12	17,0	27,5 OVERSIZE → 21,5
ER 20 HP	1 ÷ 13 OVERSIZE 14 ÷ 15	21,0	31,5 OVERSIZE → 26,5
ER 25 HP	1 ÷ 16 OVERSIZE 17 ÷ 20	26,0	34,0 OVERSIZE → 28,0
ER 32 HP	2 ÷ 20 OVERSIZE 21 ÷ 25	33,0	40,0 OVERSIZE → 34,0
ER 40 HP	3 ÷ 30 OVERSIZE 31 ÷ 32	41,0	46,0 OVERSIZE → 39,5
ER 50 HP	6 ÷ 34 OVERSIZE 35 ÷ 36	52,0	60,0 OVERSIZE 60,0