


Tabella dimensionale

RIDUZIONE da cono Morse a DIN 238

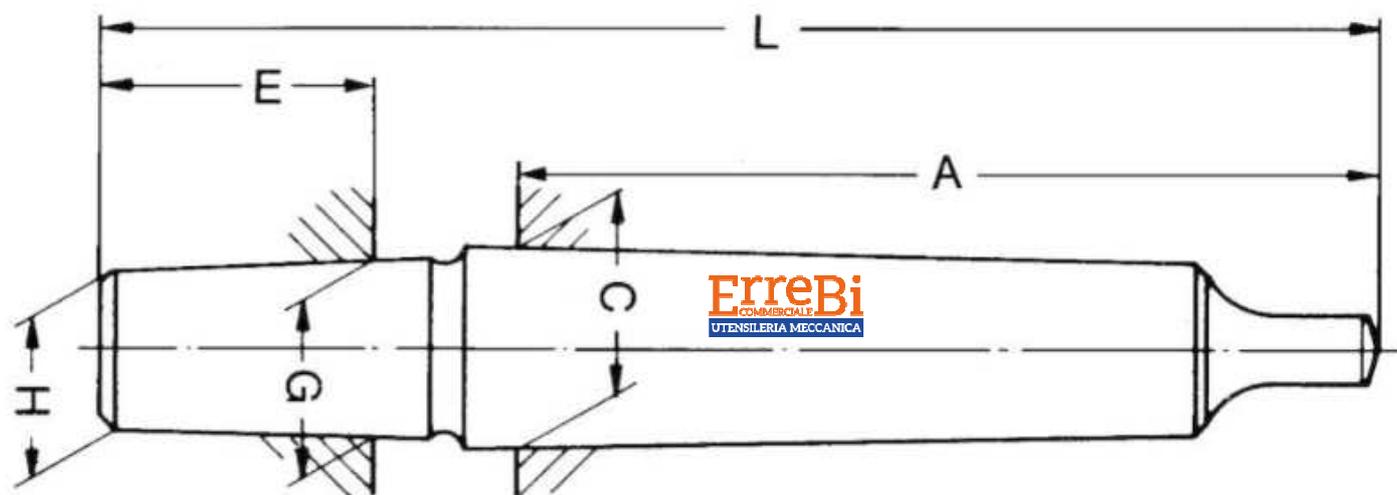

Attacco	Cono MORSE	G mm	C mm	E mm	A mm	L mm
B 10	0	10,094	9,045	14,5	56,5	80
B 10	1	10,094	12,065	14,5	62,0	86
B 12	1	12,065	12,065	18,5	62,0	90
B 16	1	15,733	12,065	24,0	62,0	97
B 18	1	17,780	12,065	32,0	62,0	106
B 10	2	10,094	17,780	14,5	75,0	102
B 12	2	12,065	17,780	18,5	75,0	105
B 16	2	15,733	17,780	24,0	75,0	112
B 18	2	17,780	17,780	32,0	75,0	120
B 22	2	21,793	17,780	40,5	75,0	128
B 12	3	12,065	23,825	18,5	94,0	124
B 16	3	15,733	23,825	24,0	94,0	133
B 18	3	17,780	23,825	32,0	94,0	140
B 22	3	21,793	23,825	40,5	94,0	147
B 24	3	23,825	23,825	50,5	94,0	157
B 22	4	21,793	31,267	40,5	117,5	175
B 24	4	23,825	31,267	50,5	117,5	186
B 24	5	23,825	44,399	50,5	149,5	221